



THE BUNKER
PLYWOOD RANGE

STRUCTURAL PLYWOOD

STRUCTURAL PLYWOOD



STRUCTURAL CD HOOP PINE

Available in:

2400 x 1200 x 7mm, 9mm, 12mm, 15mm, 17mm, 19mm, 25mm

Face Grade: CD

Untreated - Hoop Pine

F14 Structural Rated

Suitable for: Internal applications & External (when sealed)



STRUCTURAL BB HOOP PINE

Available in:

2400 x 1200 x 6.5mm, 9mm, 12mm, 15mm, 18mm, 24mm

Face Grade: BB

Untreated - Hoop Pine

F17 Structural Rated

Suitable for: Internal applications & External (when sealed)



DURAPLY ACQ TREATED

Available in:


2400 x 1200 x 9mm, 12mm, 15mm, 17mm, 25mm

Face Grade: CD

H3 ACQ treated - Hoop Pine

F14 Structural Rated

Suitable for: External applications

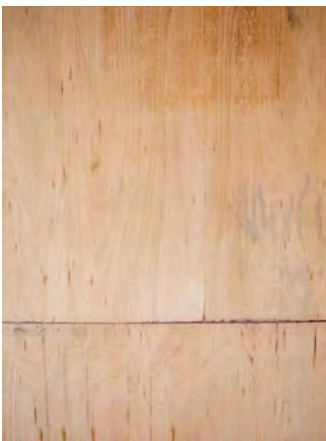

HARDWOOD BRACING

Available in:

2440, 2745, 3050 x 900 x 4mm

2440, 2745, 3050 x 1200 x 4mm


Face Grade: DD

H2 Treated - Mixed Hardwood

F22 Structural Rated

Suitable for: Bracing applications

STRUCTURAL PLYWOOD

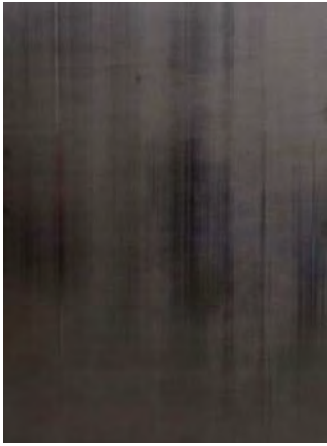

FORM

Available in:

1800 x 1200 x 17mm
2400 x 1200 x 12mm, 17mm,

Face Grade: Black Phenolic Overlay
Untreated
F17 Structural Rated
Suitable for: External applications



LONG PINE

Available in:

2700 x 1200 x 9mm, 12mm, 15mm, 17mm

Face Grade: CD
Untreated - Radiata Pine
F8 Structural Rated
Suitable for: External applications



SELEX PINE

Available in:


2400 x 1200 x 7mm, 9mm, 12mm, 15mm, 18mm, 25mm

Face Grade: BD
Untreated - Radiata Pine
F8 Structural Rated
Suitable for: Internal applications


EXTERNAL PLYWOOD

Product featured in this image is the Shadowclad raw natural grooved 150mm spacing

Treated with H3 LOSP, it's designed for vertical exterior cladding making it suitable for both residential and commercial projects. Its interlocking vertical shiplap joints ensure a straightforward and weather-resistant installation.

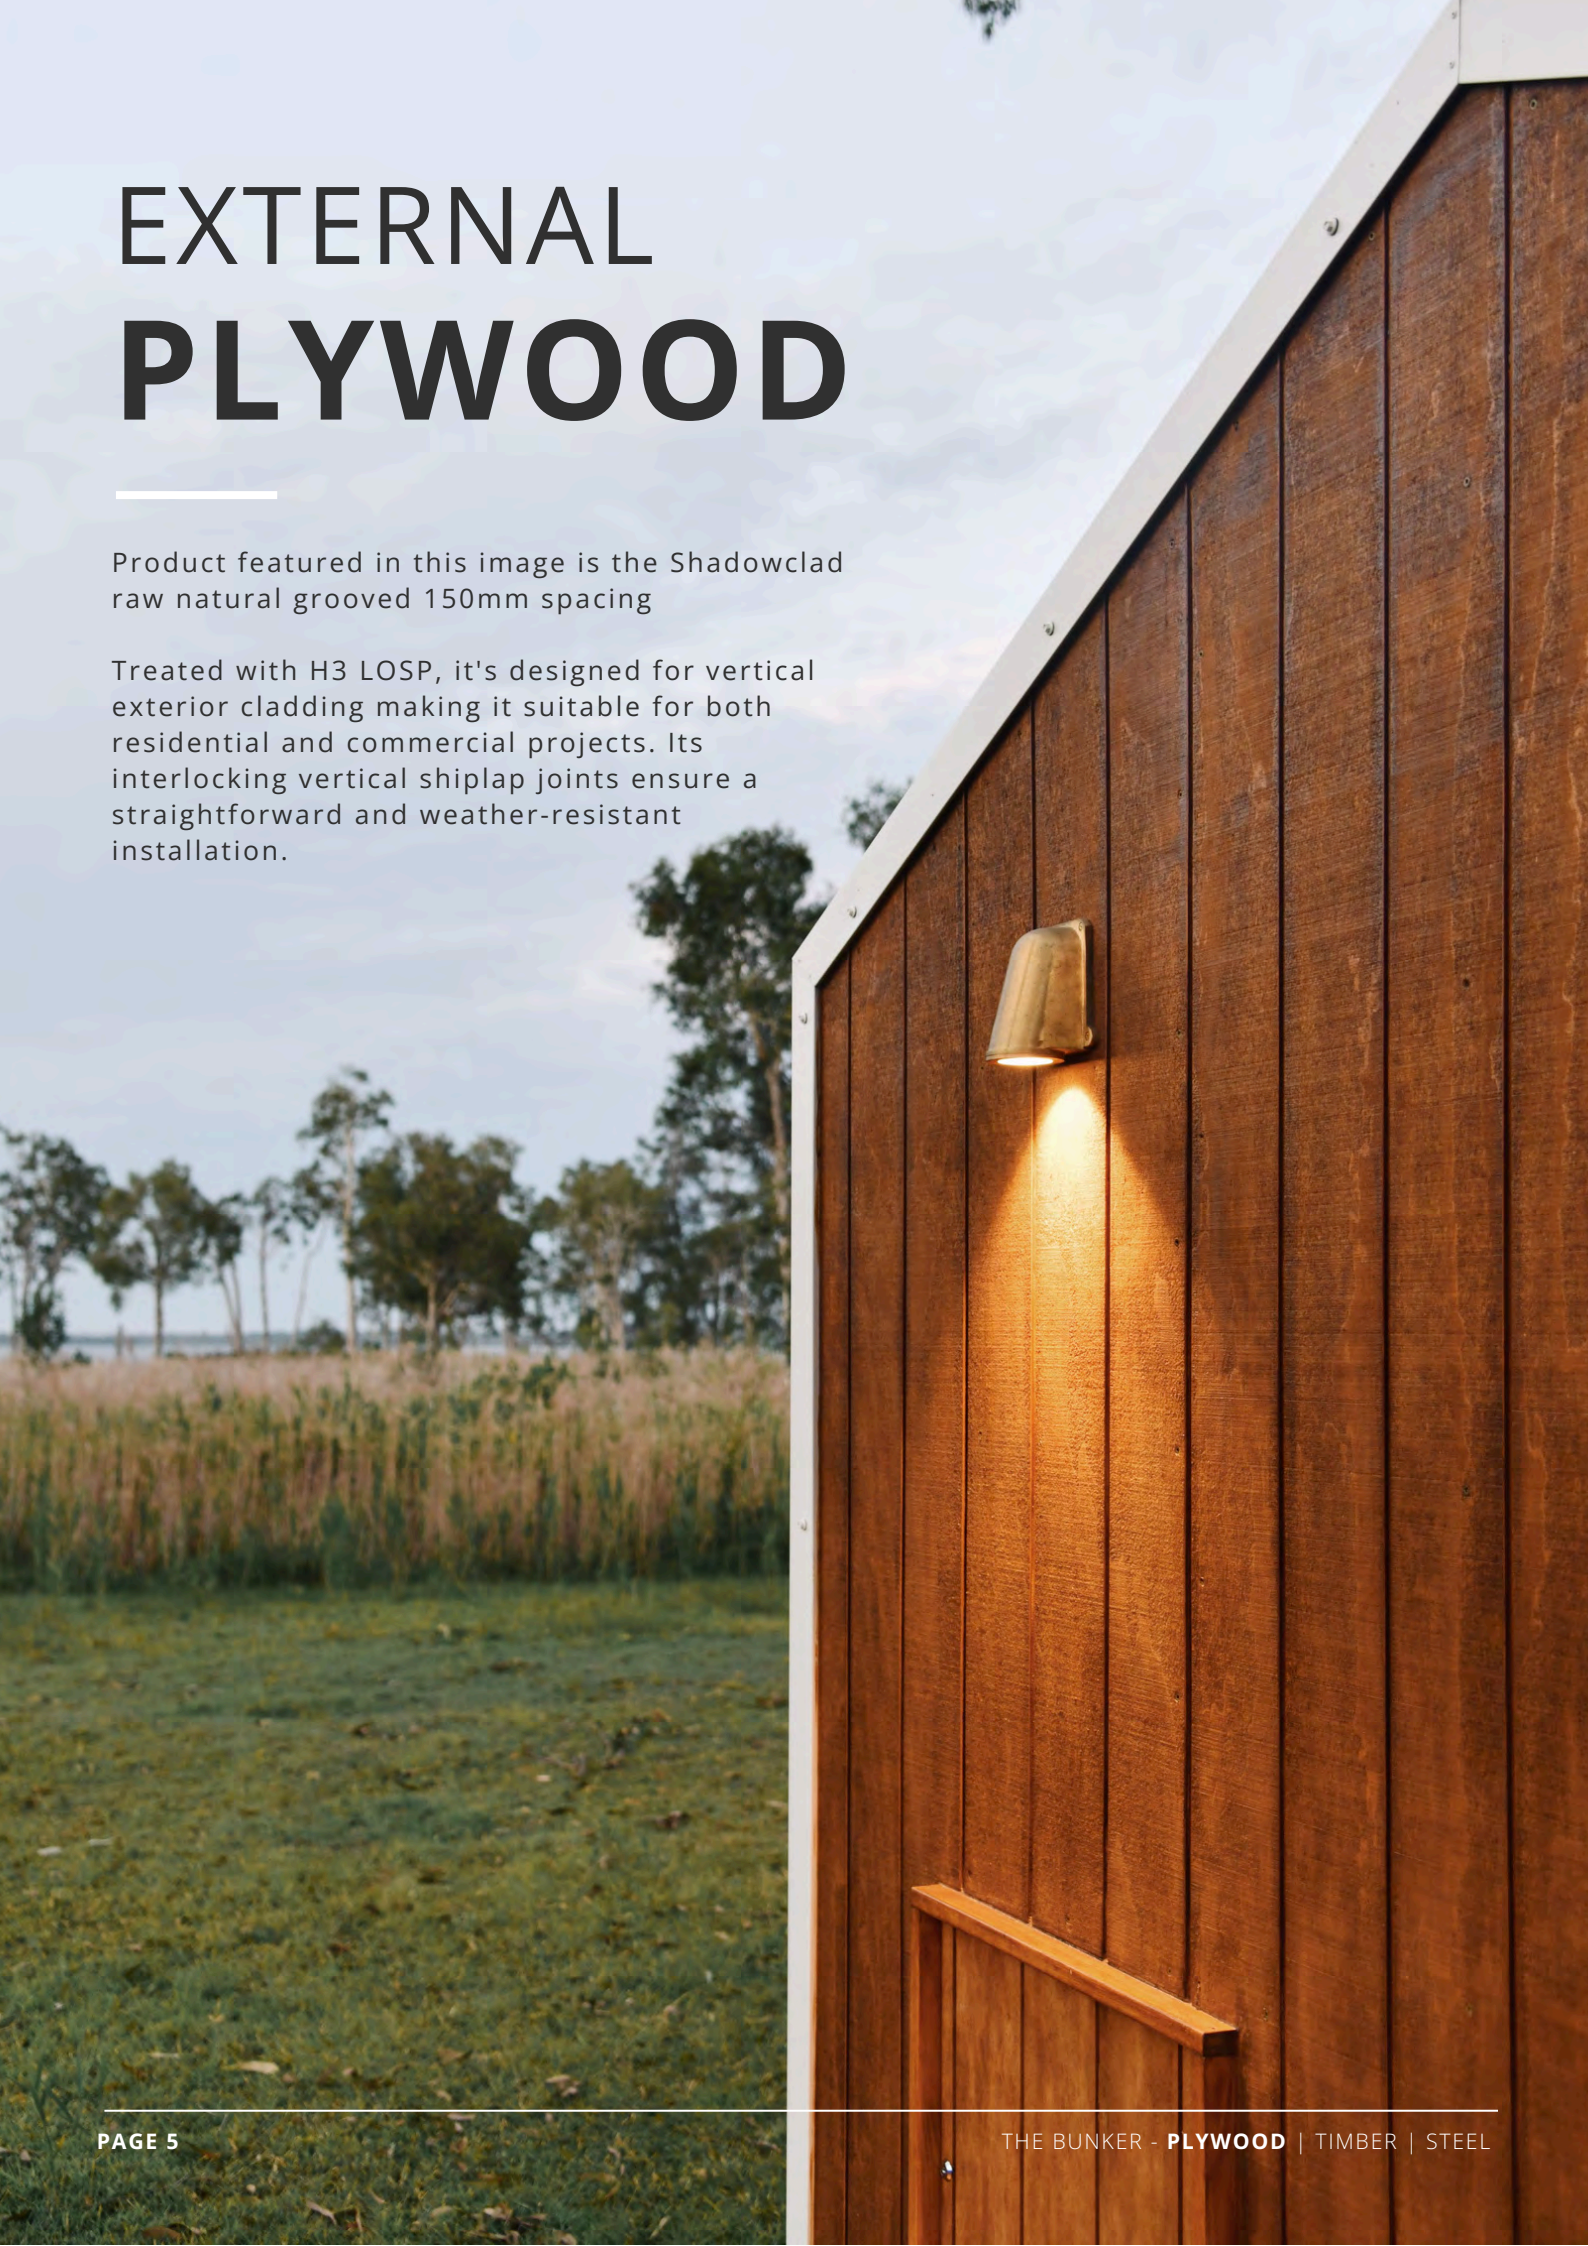

MARINE & EXTERNAL PLYWOOD

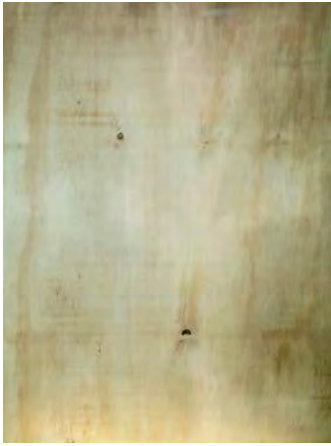

DURAPLY ACQ TREATED

Available in:


2400 x 1200 x 9mm, 12mm, 15mm, 17mm, 25mm

Face Grade: CD

H3 ACQ treated - Hoop Pine

F14 Structural Rated

Suitable for: External applications

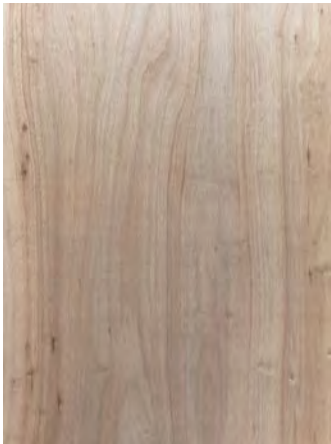

HARDWOOD EXTERIOR

Available in:


2440 x 1220 x 3.6mm, 6mm, 9mm, 12mm, 15mm, 18mm, 25mm

Face Grade: B/BB

Untreated - Messawa Hardwood

Non-structural

Suitable for: Internal & External applications

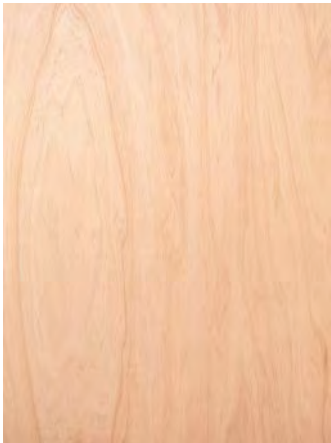

HARDWOOD MARINE

Available in:


2440 x 1220 x 4mm, 6mm, 9mm, 12mm, 15mm, 18mm, 25mm

Face Grade: A/A

Untreated - Meranti Hardwood

BS 1088

Suitable for: Internal & External applications

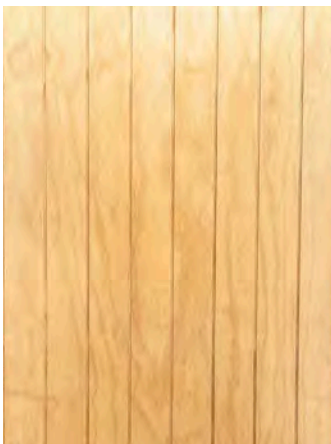

SHADOWCLAD

Available in:

2400 x 1200 x 9mm, 12mm, 15mm, 17mm, 25mm

Finishes: GROOVE Raw | Primed | TEXTURE Raw | Primed

LOSP treated - Radiata Pine

F11 Structural Rated

Suitable for: Cladding Externally



weathertex


RANGE

WEATHERTEX RANGE



**PRIMELOK CLASSIC
SMOOTH**

Available in:
200 x 3660 9.5mm

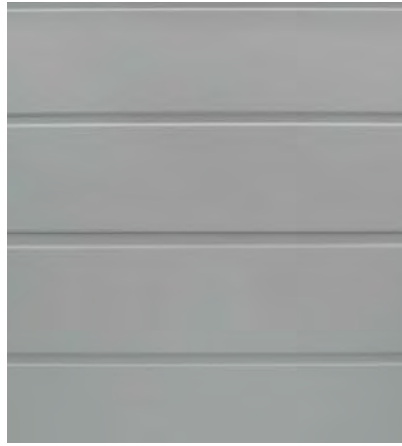

**SELFLOK ECOGROOVE
150 SMOOTH**

Available in:
300 x 3660 9.5mm



**SELFLOK ECOGROOVE
300 SMOOTH**

Available in:
300 x 3660 9.5mm



**WEATHERGROOVE
NATURAL 75**

Available in:
3660 x 1196 x 9.5mm



**WEATHERGROOVE
NATURAL 150**

Available in:
3660 x 1196 x 9.5mm



**WEATHERGROOVE
NATURAL 300**

Available in:
3660 x 1196 x 9.5mm

All Weathertex products are made out of 100% natural products, 97% hardwood and 3% paraffin wax. It's the ultimate natural cladding solution for anyone seeking sustainable building materials at no extra cost.

WEATHERTEX RANGE



**WEATHERGROOVE
SMOOTH 75**

Available in:
3660 x 1196 x 9.5mm



**WEATHERGROOVE
SMOOTH 150**

Available in:
2440 x 1196 x 9.5mm
2745 x 1196 x 9.5mm
3660 x 1196 x 9.5mm



**SELFLOK ECOGROOVE
300 SMOOTH**

Available in:
2745 x 1196 x 9.5mm
3660 x 1196 x 9.5mm



**WEATHERGROOVE
WOODSMAN 75**

Available in:
3660 x 1196 x 9.5mm



**WEATHERGROOVE
WOODSMAN 150**

Available in:
2745 x 1196 x 9.5mm
3660 x 1196 x 9.5mm

Weight/m²: 10kg


Bal Rating: 19

Off-stud joining option enables minimal waste and less timber stud layout.
Can be painted, stained or left unsealed to weather naturally.

CARAVAN PLYWOOD

Achieve the perfect balance of weight and beauty with The Bunker's essential plywood sheets, crafted to complete any mobile home while ensuring an appealing look and feel.

CARAVAN PLYWOOD

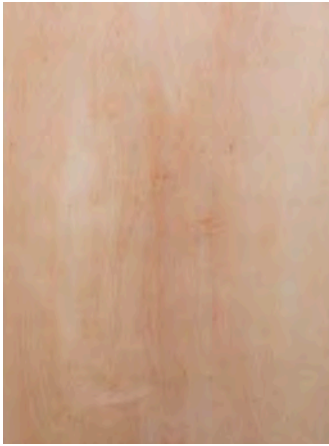

LIGHTWEIGHT

Available in:

2440 x 1220 x 3.6mm, 6mm, 9mm, 12mm, 15mm, 18mm, 24mm

Face Grade: C/D

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only



GLOSS CARAVAN POLYESTER

Available in:

2440 x 1220 x 3.2mm, 15mm

Finish: White Gloss

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only



MATT CARAVAN POLYESTER

Available in:


2440 x 1220 x 3.2mm, 15mm

Finish: White Matt

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only

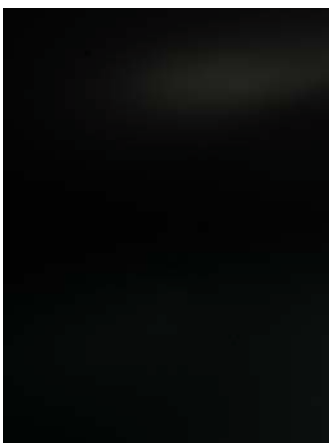

MATT CARAVAN POLYESTER

Available in:

2440 x 1220 x 3.2mm, 15mm

Finish: Black Matt

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only

CARAVAN PLYWOOD



EMBOSSSED CARAVAN POLYESTER

Available in:

2440 x 1220 x 3.2mm

Finish: White

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only



EMBOSSSED CARAVAN POLYESTER

Available in:

2440 x 1220 x 3.2mm

Finish: Grey

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only



STIPPLE CARAVAN POLYESTER

Available in:

2440 x 1220 x 3.2mm, 15mm

Finishes: White & Black

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only



LEATHER LOOK CARAVAN POLYESTER

Available in:

2440 x 1220 x 3.2mm

Finishes: White

Untreated - Falcata Wood

Non-structural

Suitable for: Internal applications only

COMPRESSED PANELS



COMPRESSED PANELS



MDF RAW

Available in:

2400 x 1200 x 9mm, 12mm, 16mm, 18mm, 25mm

2440 x 1220 x 3mm, 6mm

3600 x 1200 x 9mm, 12mm, 16mm, 18mm

Finish: Standard

Non-structural

Suitable for: Internal applications



ORIENTED STRAND BOARD

Available in:


2440 x 1220 x 9mm, 12mm

Finish: Square Edge

Untreated

Non-structural

Suitable for: Internal & External applications

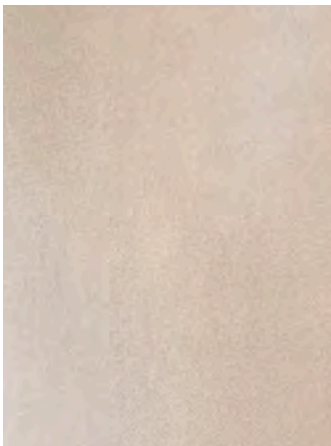

STRUCTAPANEL H2

Available in:

2440 x 1200 x 9mm, 12mm

3660 x 1200 x 9mm

Finishes: Raw

H2 termite treated

Non-structural

Suitable for: Internal applications & External (Limited Period)



WHITE MELAMINE

Available in:

2400 x 1200 x 16mm

2400 x 295, 445, 595 x 16mm

Finishes: White

Untreated

Non-structural

Suitable for: Internal applications only



RANGE



AUSSIE TINY HOUSES

EASY CRAFT RANGE



EASYVJ 60

Available in:


- 2400 x 1200 x 9mm
- 3000 x 1200 x 9mm
- 3600 x 1200 x 9mm



EASYVJ 100

Available in:

- 2400 x 1200 x 9mm
- 2700 x 1200 x 9mm
- 3000 x 1200 x 9mm
- 3600 x 1200 x 9mm
- 4500 x 1200 x 9mm
- 5400 x 1200 x 9mm

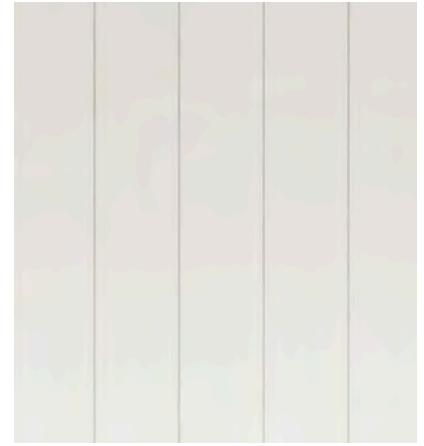

EASYVJ 150

Available in:

- 2400 x 1200 x 9mm
- 3000 x 1200 x 9mm
- 3600 x 1200 x 9mm



EASYGROOVE RANDOM PANELS

Available in:


- 2400 x 1200 x 9mm
- 3000 x 1200 x 9mm
- 3600 x 1200 x 9mm



EASYREGENCY 150

Available in:

- 2400 x 1200 x 9mm
- 3000 x 1200 x 9mm
- 3600 x 1200 x 9mm

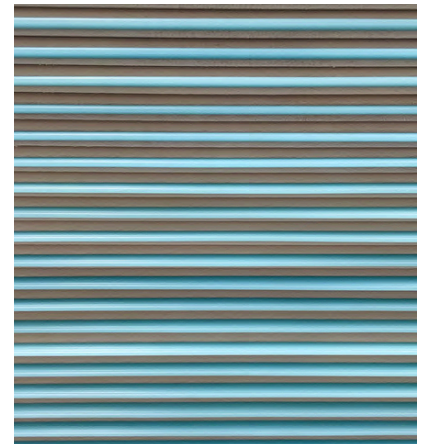

EASYVJ 100 WET AREA INTERIOR

Available in:

- 2400 x 1200 x 9mm
- 2700 x 1200 x 9mm
- 3000 x 1200 x 9mm
- 3600 x 1200 x 9mm

Easycraft has been providing decorative wall and ceiling panelling for residential and commercial projects in Australia for nearly 40 years. Proudly Australian owned and operated, using environmentally sustainable timbers and committed to quality, impact-resistant panels that are easy to install and attractive.

EASY CRAFT SILHOUETTE RANGE




SILHOUETTE CONVEX

Available in:
2700 x 1200 x 16mm




SILHOUETTE COVE

Available in:
2700 x 1200 x 16mm

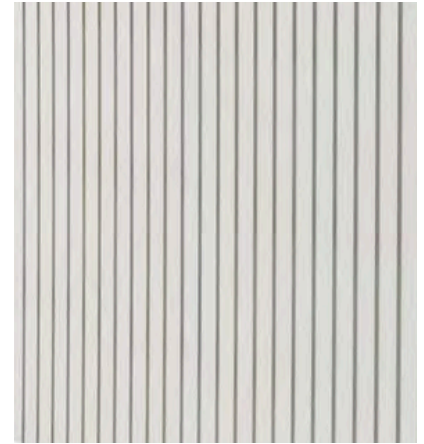

SILHOUETTE CHANNEL

Available in:
2700 x 1200 x 16mm

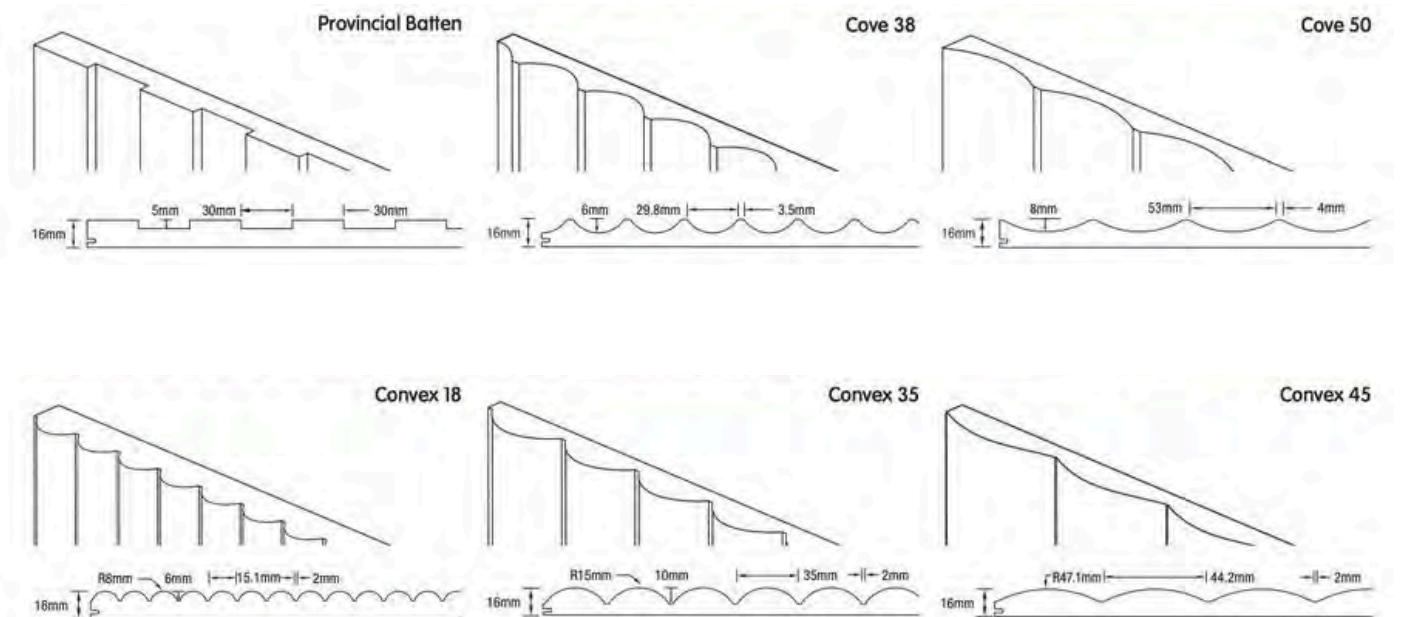

Suitable for: General purpose interior wall and ceiling linings for residential and commercial applications. Made from high quality machine grade Moisture Resistant (MRE 0) MDF, Designed to feature dramatic lines and shadows. Primed and ready to paint for fast, easy installation. Tongue & groove joining system for a seamless install.

FIBRE CEMENT



FIBRE CEMENT



CERAMIC TILE FLOOR UNDERLAY


Available in:

1800 x 1200, 1800 x 900 x 6mm

Fire Resistance

Weight per sheet - 6mm = 8.8 (kg/m²)

Suitable for: Internal applications

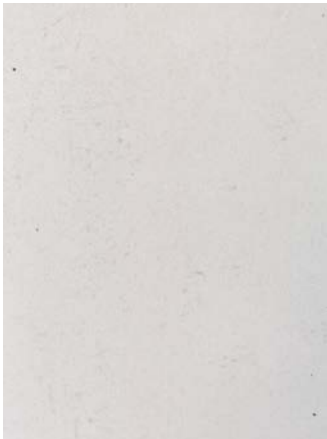

DURASHEET

Available in:

2400 x 450, 2400 x 600, 2400 x 900, 2400 x 1200 x 4.5mm, 6.0mm
2700 x 900, 1200 x 4.5mm, 6.0mm
3000 x 900, 1200 x 4.5mm, 6.0mm

Fire Resistance

Weight per sheet - 4.5mm = 6.6 (kg/m²) | 6.0mm = 8.8 (kg/m²)

Suitable for: Internal & External applications



DURALINER PLUS

Available in:

2400 x 1200 | 2700 x 1200 | 3000 x 1200 | 3600 x 1200 x 6mm

Fire Resistance

Weight per sheet - 6mm = 8.9 (kg/m²)

Suitable for: Internal applications



DURATEX

Available in:

2440 x 1200, 3050 x 1200 x 7.5mm

Fire Resistance

Weight per sheet - 7.5mm = 10.9 (kg/m²)

Suitable for: External applications

FIBRE CEMENT



DURAFLOOR

Available in:

2700 x 600 x 19mm

Fire Resistance

Weight per sheet - 19mm = 26.6 m²

Suitable for: Internal & External applications



DURAGROOVE

Available in:

2450 x 1200, 2750 x 1200, 3000 x 1200

Narrow 100mm | Wide 150mm | Extra Wide 400mm

Smooth | Woodgrain

Fire Resistance

Weight per sheet - 9mm = 13.5 (kg/m²)

Suitable for: External applications



NULINE PLUS

Available in:

175 x 14 | 205 x 14 x 4.2m

Square | Bullnose

Fire Resistance


Weight per sheet - 175mm = 3.5 (kg/m²) | 205mm = 4.1 (kg/m²)

Suitable for: External applications



FLOORING PANELS

STRUCTA RANGE

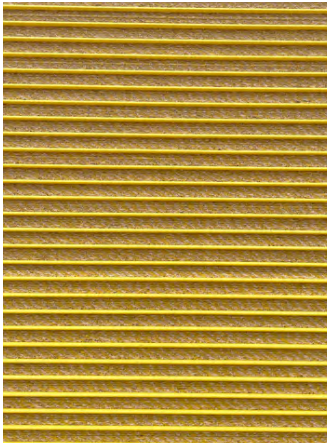

STRUCTAflor - YELLOW tongue

Available in:

3600 x 800 x 19mm

Untreated

Residential application

Suitable for: Internal applications only



STRUCTAflor - RED tongue


Available in:

3600 x 800 x 22mm

Untreated

Residential & light industrial applications

Suitable for: Internal applications only

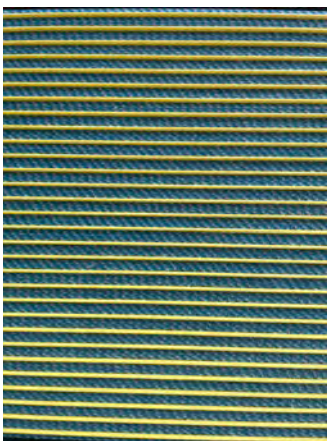

STRUCTAflor - Termiflor


Available in:

3600 x 800 x 19mm

H2 termite treated

Residential application

Suitable for: Internal applications only

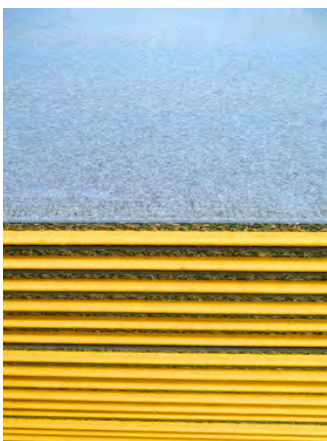

STRUCTAFLOR - RFLOR

Available in:

3600 x 800 x 19mm

Increased System R Value (Insulation)

H2 termite treated

Residential application

Suitable for: Internal applications only

FLOORING PANELS



CERAMIC TILE FLOOR UNDERLAY

Available in:

1800 x 1200, 1800 x 900 x 6mm

Fire Resistance

Weight per sheet - 6mm = 8.8 (kg/m²)

Suitable for: Internal applications



DURAFLOOR

Available in:

2700 x 600 x 19mm

Fire Resistance

Weight per sheet - 19mm = 26.6 m²

Suitable for: Internal & External applications



FLOORING T&G

Available in:

2400, 2700 x 1200 x 12mm, 15mm, 17mm, 19mm, 21mm

Face Grade: CD

Untreated - Hoop Pine

F14 Structural Rated

Suitable for: Internal applications



MAGNUM BOARD FLOORING UNDERLAY

Available in:

2700 x 600 x 18mm

Resistant to termites

Weight per sheet - 32kg per sheet

Non-combustible

Suitable for: Internal & External applications

WHERE TO BUY.

Queensland

Brisbane: 07) 3093 5500 | 20 Chrome Court, Burpengary

Beerwah: 07) 5439 0076 | 16 Moroney Place, Beerwah

Doonan: 07) 5470 1800 | 667 Noosa Eumundi Road, Doonan

New South Wales

Albury: 02) 6025 4466 | 521 Wagga Road, Lavington

Victoria

Melbourne: 03) 8339 2252 | 439 Cooper Street, Epping

Tasmania

Cambridge: 03) 6248 5777 | 10 Kennedy Drive, Cambridge

