



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 2 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

Pine Cladding Intense: Natural C34




Disclaimer:
Vertical installation is recommended for all profiles. Horizontal installation is at the user's risk and will void any warranty.


The Thermory® Pine cladding and lining range are FSC certified and sustainably sourced. They provide visual appeal, performs outstanding durability and demonstrates dimensional stability. Advanced modification techniques enhance the timber's molecular structure, ensuring longevity for interior and exterior use. The products offer excellent rot resistance with unique knots adding character. A Mix & Match combination of cladding with varied profiles that combine together to create a ribbed effect styled to meet a wide range of design needs.

Texture	Grade	Colour	Species	Size (mm)
Smooth	Class 2 Durability Thermally Stabilised Timber	Golden-brown tones	Scots Pine	140 x 20 90 x 20 68 x 42


C34 Profiles:

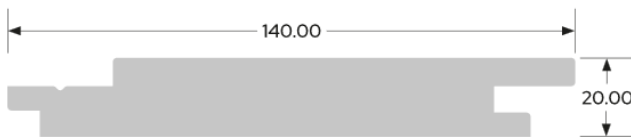

C34: 140 x 20 / cover: 121mm



C34: 68 x 42 / cover: 49mm

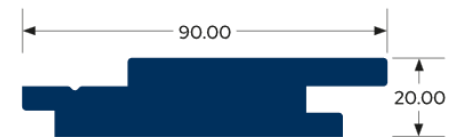

C34: 90 x 20 / cover: 71mm

Mix & Match Design Recommendation:



CLASS 2



Durability
Improved Durability and rot resistance



Stability
Enhanced dimensional stability in changing weather conditions



Chemical-Free
Thermal modification process is entirely natural

Call 1300 399 922
or email info@citytimber.com.au

1400 Centre Rd, Clayton South 3169
citytimber.com.au

