



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 2 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

## Pine Cladding Intense: Natural Trax C32G




Texture Smooth


Illing

**Grade** Class 2 Durability Thermally Stabilised Timber **Colour** Golden tones Species Scots Pine Clear Pine Spruce Pine **Size (mm)** 140 x 20

## C32G Profile:

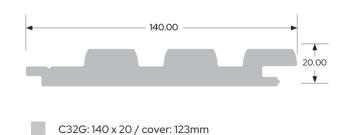

## **Corner Thermo - Spruce CP3**



One universal profile for indoor and outdoor usage. Boards with straightcut ends can be installed without exposing the endgrain.

MODALE 15+ VEARS AGAINST OCLASS 2





**Durability** Improved Durability and rot resistance



**Stability** Enhanced dimensional stability in changing weather conditions



Call 1300 399 922 or email info@citytimber.com.au 1400 Centre Rd, Clayton South 3169 citytimber.com.au



