



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 1 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

## Spruce Cladding Intense: Natural C26



Main Image: Smooth Face finish. Top Inset Image: Brushed. Bottom Inset Image: Fine Sawn detail.

### Texture

Natural Smooth  
Fine Sawn  
Brushed

### Grade

Class 1 Durability  
Thermally Stabilised Timber

### Colour

Golden tones


### Species

Spruce

### Size (mm)


141 x 19

### C26 Profile:

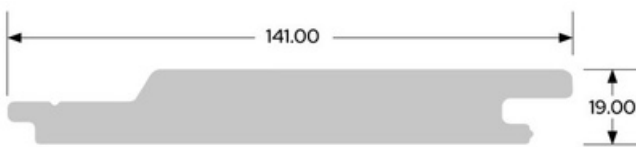

C26: 141 x 19 / cover: 125mm

### Corner Thermo -Spruce CP3



42x42

One universal profile for indoor and outdoor usage. Boards with straight-cut ends can be installed without exposing the endgrain.



**Durability**  
Improved Durability and  
rot resistance




**Stability**  
Enhanced dimensional stability  
in changing weather conditions



**Chemical-Free**  
Thermal modification  
process is entirely natural



**THERMORY®**  
LEAVE A LASTING IMPACT

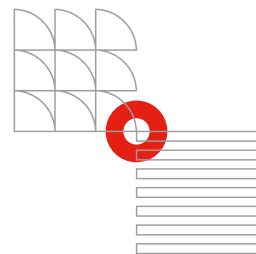

# DECLARATION OF PERFORMANCE

The undersigned, representing  
Thermory AS (Lõõtsa 1a, Tallinn, Harju County, Estonia)  
and the manufacturing plant in Loo, Harju County, Estonia  
hereby declares that the

## **THERMALLY MODIFIED SOLID WOOD SPRUCE CLADDING AND PANELING WITHOUT SURFACE COATING**

is in conformity with the provisions of the EC Regulation No 305/2011  
Construction Product Regulation system of assessment and verification of  
constancy of performance: System 3 and is in accordance with the requirements of  
EN 14915:2013

„Solid wood panelling and cladding – Characteristics,  
evaluation of conformity and marking“  
Initial type testing report No.01\_THERMORY\_EN14915

CHARACTERISTIC	PERFORMANCE DECLARATION
Species	Nordic spruce ( <i>Picea abies</i> )
Intended use	For exterior and interior use
Density and range of thickness	400 kg/m <sup>3</sup> , 18–42 mm
Reaction to fire	D-s1, d0 (tested according to standard EN14915:2013)
Emission of formaldehyde	E1
Content of pentachlorophenol	NPD
Release of other dangerous substances	NPD
Water vapor permeability	NPD
Thermal resistance	0,12 W/(m K)
Sound absorption	NPD
Biological durability (according to CEN/TS 15083-1:2005)	Class 1, when thermally modified (215 °C, Intense)



  
Liivi Viin  
CQO  
Tallinn 08.04.2022